

R T-Type Sanitary Cartridge-Housing


For fine filtration

Rosedale's sanitary service filters for sterile filtration are constructed with housings of electropolished 304 stainless steel. This "T" type sanitary housing is rated for 150 psi pressure and has a quick-release clamp closure which is safe for compressed gas applications. Outlets and inlets have sanitary flange connections. All internal surfaces can be visually inspected and easily cleaned in place. The housing uses an industry standard 222 or 226 style cartridge.

Applications for this sanitary filter housing include dairy, food and beverage processing, sterile filtration for pharmaceuticals, and sterile air/gas filtration. They are also excellent pre-filters used upstream of membrane filters.

Construction

Housings are all welded construction with all wetted parts of 304 stainless steel. All welded attachments are 300 series stainless steel. The materials and manufacturing process exceed industry standards for sterile filtration.

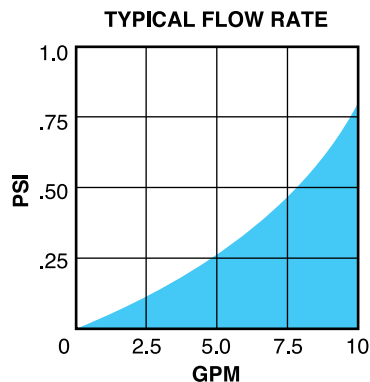


How To Order

Build an ordering code as shown in this example.

	Housing	Options
SANITARY CARTRIDGE FILTER	SAN-T-1-150-T	-222 -20-H
PIPING STYLE		
CONNECTION SIZE	1-in = 1	
PRESSURE	150 psi = 150	
O-RING MATERIAL	Teflon® = T	
CARTRIDGE STYLE	Style 222 = 222	
	Style 226 = 226	
CARTRIDGE LENGTH	10-inch = 10	
	20-inch = 20	
	30-inch = 30	
OPTIONAL	Housing stand = H	
	No options = No Symbol	

Note: Order cartridges separately.

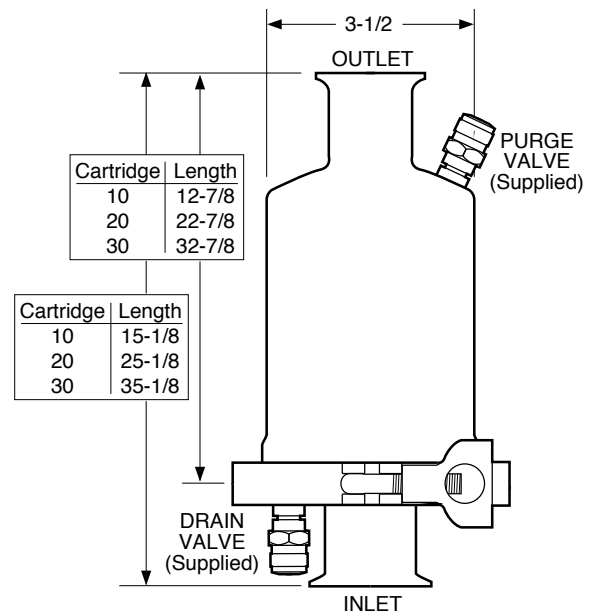

Dimensions are reference only and should not be used for hard plumbing. Consult factory for certified drawings.