

R T-Type Sanitary Cartridge-Housing


For fine filtration

Rosedale's sanitary service filters for sterile filtration are constructed with housings of electropolished 316 stainless steel. This "T" type sanitary housing is rated for 150 psi pressure and has a quick-release clamp closure which is safe for compressed gas applications. Outlets and inlets have sanitary flange connections. All internal surfaces can be visually inspected and easily cleaned in place. The housing uses an industry standard 222 or 226 style cartridge.

Applications for this sanitary filter housing include dairy, food and beverage processing, sterile filtration for pharmaceuticals, and sterile air/gas filtration. They are also excellent pre-filters used upstream of membrane filters.

Construction

Housings are all welded construction with all wetted parts of 316 stainless steel. All welded attachments are 300 series stainless steel. The materials and manufacturing process exceed industry standards for sterile filtration. See pages 193-202 for sanitary use filter cartridges.

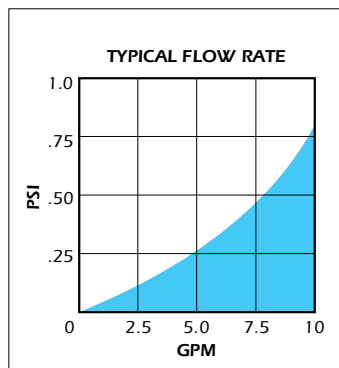

How To Order

Build an ordering code as shown in this example.

	Housing	Options
SANITARY CARTRIDGE FILTER	SAN-T-1- 150-T	-222 -20-H
PIPING STYLE		
CONNECTION SIZE		
1-in = 1		
PRESSURE		
150 psi = 150		
O-RING MATERIAL		
Teflon® = T		
CARTRIDGE STYLE		
Style 222 = 222		
Style 226 = 226		
CARTRIDGE LENGTH		
10-inch = 10		
20-inch = 20		
30-inch = 30		
OPTIONAL		
Housing stand = H		
No options = No Symbol		

Note: Order cartridges separately. See page 150.

