C O N V E R T I B L E F I L T E R H O U S I N G S

# Convertible Filter Housings Use Either Bags or Cartridges

You can switch from one to the other instantly

The emergence of new, more effective filter bag materials has challenged the popular filter cartridge. Filter bags are now an attractive, economical alternative to cartridges in many applications. Bags cost less, are easier to install and remove, and require less room in storage and disposal.

The convertible filter housings from Rosedale offer you the ability to use filter bags in place of cartridges without burning your bridges behind you. You can always change back to cartridges, for whatever reason.

#### **Features**


- Permanently piped housings-no repiping necessary for change-over
- Covers are O-ring sealed
- Designed for standard double open-end type cartridges. Can also be supplied adapted to other cartridgeend configurations
- Carbon steel, 304 or 316 stainless steel construction for housing
- All housings are electropolished to resist adhesion of dirt and scale
- ASME code stamp is available
- Adjustable-height legs are included
- V-post spring seal for both options are in 316 stainless steel

## **Options**

- Filter bag hold-down devices
- Sanitary construction
- Different outlet connection
- Higher pressure ratings
- Extra-length legs
- Heat jacketing
- Duplex units

#### **Flow Rates**


Rosedale's convertible filter housings are offered in two diameters to hold 3 and 5 cartridges, respectively. The 3-cartridge housings are nominally rated at 70 gpm\*. The 5-cartridge Series housings are nominally rated at 100 gpm\*. These ratings are governed by the restrictive openings in the cartridge support plate. They do not take into account the pressure drops imposed by the bags or cartridges used.

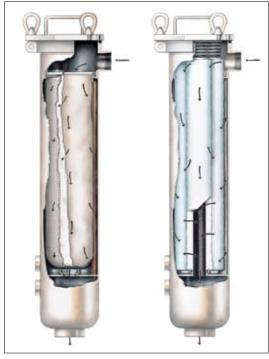

Pictured is a Model 6330. It can hold three 30-in. long cartridges (shown inserted) or a filter bag and support basket (at left). The two 3/4-in. ports at the bottom of the housing are 1) a dirty liquid drain (upper port), and 2) a clean liquid drain (lower port). The dirty liquid drain need not be used when filter bags are employed; if bags are properly removed, no dirt washes off downstream. (The use of a liquid displacer makes this easier to do.)

<sup>\*30-</sup>inch cartridge

### **Dimensions** (IN)

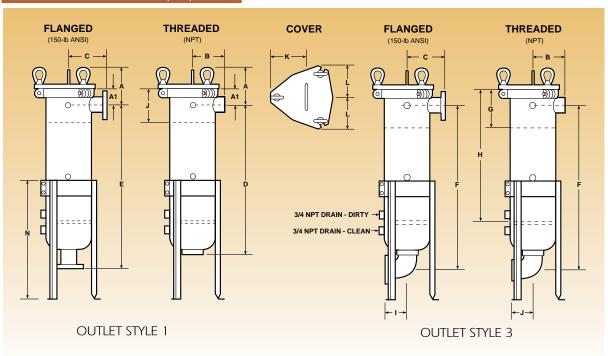

# **Dimensions** (IN)

Model	Pipe	Α	<b>A1</b>	В	C	D	E	F	G	H	1	J
	Size											
6320	1	6.3	2.5	4.3	6.0	26.3	28.5	21.0	26.8	4.6	22.8	5.0
	1-1/4	6.3	2.5	4.3	6.0	26.3	28.5	21.0	27.2	4.6	22.8	5.0
	1-1/2	6.3	2.5	4.3	6.0	26.3	28.5	21.0	27.6	4.6	22.8	5.0
	2	7.1	3.4	4.3	6.0	25.4	28.5	19.5	27.4	5.8	22.8	5.0
	3	7.1	3.4	4.3	6.0	25.6	28.5	19.0	28.7	5.8	22.8	7.3
6330	1	6.3	2.5	4.3	6.0	36.3	38.5	31.0	36.8	4.6	32.8	5.0
	1-1/4	6.3	2.5	4.3	6.0	36.3	38.5	31.0	37.2	4.6	32.8	5.0
	1-/12	6.3	2.5	4.3	6.0	36.3	38.5	31.0	37.6	4.6	32.8	5.0
	2	7.1	3.4	4.3	6.0	35.4	38.5	29.5	37.4	5.8	32.8	5.0
	3	7.1	3.4	4.3	6.0	35.8	38.5	29.0	38.7	5.8	32.8	7.3
8520	3/4	7.75	4.0	5.3	7.5	30.0	32.3	30.3	4.8	25.8	5.0	1.9
	1	7.75	4.0	5.3	7.5	30.0	32.3	30.6	4.8	25.8	5.0	2.5
	1-1/4	7.75	4.0	5.3	7.5	30.0	32.3	31.0	4.8	25.8	5.0	2.9
	1-/12	7.75	4.0	5.6	7.5	30.0	32.3	31.4	4.8	25.8	5.0	3.3
	2	7.75	4.0	5.88	7.5	30.0	32.3	32.1	4.8	25.8	5.0	4.0
	3	7.75	4.0	6.7	7.5	30.6	31.8	33.5	6.5	25.8	7.3	6.1
8530	3/4	7.75	4.0	5.3	7.5	42.3	42.3	40.3	4.8	35.8	5.0	1.9
	1	7.75	4.0	5.3	7.5	42.3	42.3	40.6	4.8	35.8	5.0	2.5
	1-1/4	7.75	4.0	5.3	7.5	42.3	42.3	41.0	4.8	35.8	5.0	2.9
	1-1/2	7.75	4.0	5.6	7.5	42.3	42.3	41.4	4.8	35.8	5.0	3.3
	2	7.75	4.0	5.88	7.5	42.3	42.3	42.1	4.8	35.8	5.0	4.0
	3	7.75	4.0	6.7	7.5	41.8	41.6	43.5	6.5	35.8	7.3	6.1

C O N V E R T I B L E F I L T E R H O U S I N G S

# How To Order

Build an ordering code as shown in the example. Each option is available only on the model series indicated in the colored blocks preceding its description.

#### **Key To Blocks**

= Series 6300= Series 8500

